



## TABLE OF CONTENTS

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| <b>Strapping Machine</b>                                              | 3  |
| Fully Automatic Strapping Machine JNY-85 Series                       | 3  |
| Fully Automatic Strapping Machine JN-85Y UDH with Double Sealing Head | 3  |
| Fully Automatic Strapping Machine JN-85Y S-2HT                        | 5  |
| Fully Automatic Strapping Machine JN-85Y U Big Arch Model             | 6  |
| Fully Automatic Strapping Machine JN-85Y U-4HT                        | 7  |
| Fully Automatic Strapping Machine JN-85Y RS                           | 8  |
| Fully Automatic Strapping Machine JN-85Y U                            | 9  |
| Fully Automatic Strapping Machine JN-85 PPRAP                         | 10 |
| Fully Automatic Strapping Machine JN-85 WHM                           | 12 |
| Fully Automatic Strapping Machine M-60 Series                         | 14 |
| Fully Automatic Strapping Machine M-60AX PB-2HT                       | 14 |
| Fully Automatic Strapping Machine M-60AXPB-AP-2HT                     | 16 |
| Fully Automatic Strapping Machine M-60AX 940D                         | 17 |
| Fully Automatic Strapping Machine M-60AX 940                          | 18 |
| Fully Automatic Strapping Machine M-60AX PR-3HT                       | 19 |
| Fully Automatic Strapping Machine M-60AX-900D                         | 20 |
| Fully Automatic Strapping Machine M-60AXPR-2HT                        | 21 |
| Fully Automatic Strapping Machine M-60AX-NM                           | 22 |
| Fully Automatic Strapping Machine M-60AX N5                           | 23 |
| Fully Automatic Strapping Machine M-60AXM                             | 24 |
| Fully Automatic Strapping Machine M-60AXN                             | 26 |
| Fully Automatic Strapping Machine M-60AX                              | 28 |
| Fully Automatic Strapping Machine NS3A Series                         | 31 |
| Fully Automatic Strapping Machine NS-3ADMS                            | 31 |
| Fully Automatic Strapping Machine NS-3AL Low Tabled Model             | 33 |
| Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model          | 35 |
| Fully Automatic Strapping Machine NS-3AD Standard Model               | 37 |
| Fully Automatic Strapping System JN-85 Series                         | 40 |
| Fully Automatic Strapping System JN-85 APN                            | 40 |



|                                                        |    |
|--------------------------------------------------------|----|
| Fully Automatic Strapping System JN-85 OP .....        | 42 |
| Fully Automatic Strapping System JN-85 PRAPN .....     | 43 |
| Fully Automatic Strapping System JN-85 PRU .....       | 44 |
| Fully Automatic Strapping System JN-85 LPBU .....      | 45 |
| Fully Automatic Strapping System JN-85 PBU .....       | 46 |
| Fully Automatic Strapping System JN-85 LPRU .....      | 47 |
| Fully Automatic Strapping System JN-85 EM .....        | 48 |
| Semi-automatic pallet strapping machine JN-85 PS ..... | 50 |
| Fully Automatic Strapping System JN-85 SE .....        | 51 |
| Semi-auto Pallet Strapping Machine JN-85 PSA .....     | 52 |
| Fully Automatic Strapping System JN-85 ZE .....        | 53 |
| Fully Automatic Strapping System JN-85 E .....         | 55 |
| Fully Automatic Strapping System JN-85 PBAPN .....     | 57 |
| Fully Automatic Strapping Machine - JN-85 PBTAPN ..... | 58 |
| Semi-Automatic Strapping Machine JN-740-Series .....   | 60 |
| Semi-Automatic Strapping Machine JN- 740DH .....       | 60 |
| Semi-Automatic Strapping Machine JN- 740 .....         | 62 |
| Semi-Automatic Strapping Machine JN- 700 .....         | 64 |
| Semi-Automatic Strapping Machine JN- 600 .....         | 65 |
| Semi-Automatic Strapping Machine JN- 600VS .....       | 67 |
| Semi-Automatic Strapping Machine JN- 7mini-B .....     | 69 |




**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

## STRAPPING MACHINE

# FULLY AUTOMATIC STRAPPING MACHINE JNY-85 SERIES



### FULLY AUTOMATIC STRAPPING MACHINE JN-85Y UDH WITH DOUBLE SEALING HEAD

**SKU:** JN-85Y UDH

**Fully Automatic Strapping Machine JN-85Y UDH with Double Sealing Head**

- Basic functions are the same as the side sealing machine of JN-85YU Big Arch Model, but are equipped with Double Sealing Heads for customer special requirements.
- The machine can be redesigned and installed underground. (Optional)
- Fully Automatic Strapping Machine JN-85Y UDH is equipped with free roller conveyors or customer's power driving (roller) conveyors, etc. (Optional)
- Iron Arch Cover and corner stabilizers will be used for this special machine for arch stability and safety reasons.
- Dispenser core inner diameter: Ø406 mm (Better)

#### Specifications

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Arch Size         | 1600W x 2800H mm<br>(Iron Cover Arch)                        |
| Power Supply      | 220V/380V/415V 3 Phase                                       |
| Strap Cycle Speed | 22-25 Cycles/Min. (50HZ)<br>(It depends on the package size) |
| Tension Strength  | Max. 70 kg                                                   |
| Dimensions        | 3125W x 1140D x 2995H mm                                     |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Arch Size         | 1600W x 2800H mm<br>(Iron Cover Arch)                        |
| Power Supply      | 220V/380V/415V 3 Phase                                       |
| Strap Cycle Speed | 22-25 Cycles/Min. (50HZ)<br>(It depends on the package size) |
| Tension Strength  | Max. 70 kg                                                   |
| Dimensions        | 3125W x 1140D x 2995H mm                                     |
| Strap Width       | 15 or 19 mm<br>(Change kits and adjustments)                 |
| Sealing Method    | Heat Sealing                                                 |
| Max Packing Size  |                                                              |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE JN-85Y S-2HT

**SKU:** JN-85Y S-2HT

### Fully Automatic Strapping Machine JN-85Y S-2HT with 2 photocells

- Machine frame and most of the parts & accessories are made of stainless steel.
- Equipped with an IP66 approved ABS control box (i.e. waterproof, dustproof, acid-proof and alkali-proof)
- Electricity leakage breaker protected main-power switch on control panel.
- Connected with the user's power driving (rollers) conveyors. (Optional)
- Fully Automatic Strapping Machine JN-85Y S-2HT is suitable for strapping seafood, frozen food or food strapping systems, etc.
- Optional installation for different needs:
- Fully Automatic Strapping Machine JN-85Y S-2HT has a stainless Steel Arch
- Stainless Steel Castors
- Internal lamp to keep cabinet dry

### Specifications

|                   |                                                                     |
|-------------------|---------------------------------------------------------------------|
| Arch Size         | 600W x 1050H mm (Aluminium Arch)<br>(Optional Stainless Steel Arch) |
| Power Supply      | 110/220V 50/60Hz 1Ph,<br>220V/380V/415V 50/60Hz 3 Ph;               |
| Strap Cycle Speed | 26 Cycles/Min. (60HZ)<br>(It depends on the package size)           |
| Tension Strength  | Max. 70 kg                                                          |
| Dimensions        | 1395W x 640D x H mm                                                 |
| Strap Width       | 9-15 mm<br>(Change kits and adjustment)                             |
| Sealing Method    | Heat Sealing                                                        |
| Max Packing Size  |                                                                     |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com



## FULLY AUTOMATIC STRAPPING MACHINE JN-85Y U BIG ARCH MODEL

**SKU:** N/A

### Fully Automatic Strapping Machine JN-85Y U Big Arch Model

- Basic functions are the same as the standard model. (Refer to Standard Model)
- If the arch size is larger than standard by total 1000 mm, then to be equipped with an additional sub-pool box is necessary.
- Connected with free roller tables or power roller conveyors is optional equipment.
- Iron Arch Cover and corner stabilizers will be used for a big arch for arch stability and safety reasons.
- Fully Automatic Strapping Machine JN-85Y U is equipped with an "Arch Strap Guide" to stabilize the P.P. strap to its proper position.
- P.E.T. strap strapping system is available and optional.
- Dispenser core inner diameter: Ø406 mm. (Optional)

### Specifications

|                   |                                                         |                                   |
|-------------------|---------------------------------------------------------|-----------------------------------|
| Specifications    |                                                         | QUICK 3PL<br>LOGISTICS SIMPLIFIED |
| Arch Size         | 1200W x 2800H mm<br>(Iron Cover Arch)(Optional)         |                                   |
| Power Supply      | 110/220V 50/60Hz 1Ph,<br>220V/380V/415V 50/60Hz 3 Ph;   |                                   |
| Strap Cycle Speed | 3 Sec/Cycles (60HZ)<br>(It depends on the package size) |                                   |
| Tension Strength  | Max. 70 kg                                              |                                   |
| Dimensions        | 2745W x 640D x 3365H mm                                 |                                   |
| Strap Width       | 12, 15 or 19 mm                                         |                                   |
| Sealing Method    | Heat Sealing                                            |                                   |
| Max Packing Size  |                                                         |                                   |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE JN-85Y U-4HT

**SKU:** JN-85Y U-4HT

### Fully Automatic Strapping Machine JN-85Y U-4HT with Double Dispensers

- With double dispensers, it will save the users a lot of time on changing the P.P. strap coil.
- Available to connect with free roller conveyors or power roller conveyors to be a complete strapping line.
- The basic function of the machine is equipped with 2 photocells. (Option: with 3 photocells or 4 photocells, etc. It depends on the customers' requirements.)
- Fully Automatic Strapping Machine JN-85Y U-4HT is equipped with an "Arch Strap Guide" or "Brushes Set" to stabilize the P.P. strap to its proper position. (Optional)
- P.E.T. strap strapping system is available and optional. Dispenser core inner diameter: Ø 406 mm. (Optional)
- Red / Yellow / Green warning lamp and buzzer. (Optional)
- Iron arch cover and corner stabilizers will be used for a big arch for arch stability and safety reasons. (Optional)

### Specifications

|                   |                                                         |
|-------------------|---------------------------------------------------------|
| Arch Size         | 900W x 1350 mm<br>(Aluminium arch cover)                |
| Power Supply      | 110/220V/1 Phase,<br>220V/380V/415V 3 Phase             |
| Strap Cycle Speed | 3 Sec/Cycles (60HZ)<br>(It depends on the package size) |
| Tension Strength  | Max. 70 kg                                              |
| Dimensions        | 1410W x 640D x 1810H mm                                 |
| Strap Width       | 12 / 15 / 19 mm (Option)                                |
| Sealing Method    | Heat Sealing                                            |
| Max Packing Size  | 1800W x 640D x 2165H mm                                 |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com



## FULLY AUTOMATIC STRAPPING MACHINE JN-85Y RS

**SKU:** JN-85Y RS

### Fully Automatic Strapping Machine JN-85Y RS with Free Roller Table

- Fully Automatic Strapping Machine JN-85Y RS's frame and most of the hardware are made of stainless steel. This model is rustproof and suitable for operating in damp areas or strapping wet packages.
- Accessing height height-adjustable ABS-free roller table (Between 585~685mm).
- Equipped with height-adjustable stainless steel stands (Max 100mm).
- Equipped with an IP-66 approved waterproof and dustproof ABS control box.
- Electricity leakage breaker protected main-power switch on the control panel, and an optional device installation of a lamp to keep the inner temperature and the machine interior dry

### Specifications

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| QUICK 3PL<br>LOGISTICS SIMPLIFIED |                                                 |
| Arch Size                         | 600W x 630H mm (Standard)                       |
| Power Supply                      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| Strap Cycle Speed                 | 28 Cycles /60 sec                               |
| Tension Strength                  | Max. 70 kg                                      |
| Dimensions                        | 1410W x 640D x 1810H mm                         |
| Strap Width                       | 6-15 mm                                         |
| Sealing Method                    | Heat Sealing                                    |
| Table Height                      | 565-685mm                                       |
| Max Packing Size                  | 600W x 530-630H mm                              |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com



## FULLY AUTOMATIC STRAPPING MACHINE JN-85Y U

**SKU:** JN-85Y U

**Fully Automatic Strapping Machine JN-85Y U**

### Standard Model

- With indicating and detecting functions when forward feeding the strap positioning.
- The retry feeding of auto auto-correcting function to correct the failure strap.
- Safety internal control voltage: 24 volts. (Optional)
- All side-sealing models should note the minimum height of the packaging area
- Fully Automatic Strapping Machine JN-85Y U's side-sealing models can be equipped with a minimum of 2 photocells to cooperate with existing input and output conveyors with controlling circuitry, and the model will add -2HT in the end.



- Optional Functions by Order Requests.
- Detection Function of Feeding Strap Position
- Indication Function of Feeding Strap Position
- Re-Feed Strap Function
- Control Voltage: 24 Volt

### Specifications

|                                   |                                                 |
|-----------------------------------|-------------------------------------------------|
| QUICK 3PL<br>LOGISTICS SIMPLIFIED |                                                 |
| Arch Size                         | 600W x 850H mm (Standard)                       |
| Power Supply                      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| Strap Cycle Speed                 | 28 Cycles /60 sec                               |
| Tension Strength                  | Max. 70 kg                                      |
| Dimensions                        | 1400W x 640D x 1740H mm                         |
| Strap Width                       | 9-15 mm                                         |
| Sealing Method                    | Heat Sealing                                    |
| Max Packing Size                  |                                                 |

**Categories:** [Strapping Machine](#), [Fully Automatic Strapping Machine JNY-85 Series](#)



## FULLY AUTOMATIC STRAPPING MACHINE JN-85 PPRAP

**SKU:** JN-85 PPRAP

### Fully Automatic Strapping Machine JN-85 PPRAP

#### With the wrapping machine

- The JN-85PPR is designed to strap pallets, and the Moveable Strap Guide will go through the pallet to complete the strapping purpose.
- Fully Automatic Strapping Machine JN-85 PPRAP is equipped with a movable side sealing head and 2 (two) photocells (Standard). The machine can be equipped with 3 (three) or 4 (four) photocells, which depend on the customer's requirements. (Optional).
- The side sealing and movable head stay close to the package to ensure a tight strapping effect.
- Fully Automatic Strapping Machine JN-85 PPRAP is equipped with a warning (3 color) lamp and a buzzer which alerts the operator of irregular situations such as the strap does not go to its proper position, trouble with strapping guide, etc.
- Can be connected with input conveyors, a 90-degree turntable, and output conveyors, etc. (Optional). It depends on customers' requirements. The design can be changed accordingly.
- Equipped with side Air Compression (Cylinder). (Optional)
- P.E.T., a strapping system, is available and optional.
- Dispenser core inner diameter: Ø 406 mm (Optional)

#### Specifications

|                     |                                                          |
|---------------------|----------------------------------------------------------|
| Arch Size           | 1300W x 2500H mm (Standard)                              |
| Power Supply        | 220V/380/415V 50/60Hz 3 Ph                               |
| Tension Strength    | Max. 70 kg<br>(Higher tensioning is an optional request) |
| Sealing Head Stroke | 0-250 mm                                                 |
| Dimensions          | 1100W x 500H mm                                          |
| Strap Width         | 12-19 mm                                                 |
| Sealing Method      | Heat Sealing                                             |
| Max Packing Size    | 1120W x 1400L x 2400H mm                                 |

**Categories:** [Strapping Machine](#), [Fully Automatic Strapping Machine JNY-85 Series](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE JN-85 WHM

**SKU:** JN-85 WHM

### Fully Automatic Strapping Machine JN-85 WHM



- New innovative design for horizontal strapping applications with chain-driven vertical movement.
- Fully Automatic Strapping Machine JN-85 WHM is equipped with 2 photocells (Standard). The machine can be equipped with 3 (three) or 4 (four) photocells, which depend on the customer's requirements. (Optional).
- Horizontal movable strapping head (100-200mm) can approach the package and tightly strap it.
- Exhaust of the strap detection function to notice by the warning lamp.(Optional).
- Incorrectly strapping the feeding detection function to the warning lamp. (Optional).
- The Arch Size is custom-made to user requirements.
- P.E.T. strapping system is available as an option.

### Specifications

|                     |                                   |
|---------------------|-----------------------------------|
| Arch Size           | 1250W x 1200H mm (Aluminium Arch) |
| Power Supply        | 220V/380/415V 50/60Hz 3 Ph        |
| Tension Strength    | Max. 70 kg                        |
| Sealing Head Stroke | 1500 mm                           |
| Dimensions          | 1700W x 1080D x 2300H mm          |
| Strap Width         | 9-19 mm                           |
| Sealing Method      | Heat Sealing                      |
| Max Packing Size    |                                   |

**Categories:** [Fully Automatic Strapping Machine JNY-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



# FULLY AUTOMATIC STRAPPING MACHINE M-60 SERIES



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX PB-2HT

**SKU:** M-60AX PB-2HT

### Fully Automatic Strapping Machine M-60AX PB-2HT

- Power Belt Table (with 8 timing Belts).
- Fully Automatic Strapping Machine M-60AX PB-2HT is equipped with two photocells(2HT), safely 21V, and a PLC electric control system.
- Users can choose to strap for 1 strap, 2 straps, or no strap via the control panel, depending on the user's choice.
- Supply a circuit to combine the input & output of the conveyors.
- 110/220V single-phase is available.
- Easy maintenance by the raised top cover
- Patent now aluminum arch with iron arch cover (Standard)
- The other details are as same as M-60AX

### Specifications

|                                     |                                                              |
|-------------------------------------|--------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 750 x 565 mm<br>(Iron Arch Cover)(Standard)                  |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                      |
| <b>Strap Cycle Speed</b>            | 25-27 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 1290 x 640 x 1470 mm (Standard)                              |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment)                    |
| <b>Tension Strength</b>             | 5 - 75 kg                                                    |
| <b>Table Height</b>                 | 810 mm                                                       |
| <b>Available Packing Size (WxH)</b> | 250-500 x 30-450 mm                                          |
| <b>Net Weight</b>                   | 247kg                                                        |
| <b>Sealing Method</b>               | Heat Sealing                                                 |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE M-60AXPB-AP-2HT

**SKU:** M-60AXPB-AP-2HT

### Fully Automatic Strapping Machine M-60AXPB-AP-2HT

- Equipped with light-duty air pressure. (Pressure 6 kg/cm (Bar), Cylinder, inner 050 mm, Stroke 550mm)
- Fully Automatic Strapping Machine M-60AXPB-AP-2HT is suitable for strapping cartons, paper boards, or pre-transported formative cases, etc.
- According to requirements, additional functions, such as delaying the strapping, are available (Optional)
- Arch site is optional to fit various packages.
- The other details are as same as M-60AXPB-2HT

### Specifications

|                                     |                                                              |
|-------------------------------------|--------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 750 x 565 mm<br>(Iron Arch Cover)(Standard)                  |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                      |
| <b>Strap Cycle Speed</b>            | 25-27 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 1394 x 645 x 1615 mm (Standard)                              |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustments)                   |
| <b>Tension Strength</b>             | 5 - 75 kg                                                    |
| <b>Table Height</b>                 | 810 mm                                                       |
| <b>Available Packing Size (WxH)</b> | 250-500 x 30-450 mm                                          |
| <b>Net Weight</b>                   | 323 kg                                                       |
| <b>Sealing Method</b>               | Heat Sealing                                                 |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX 940D

**SKU:** M-60AX 940D

### Fully Automatic Strapping Machine M-60AX 940D

- 2 front doors type
- Fully Automatic Strapping Machine M-60AX 940D has a retractable coil holder for easy coil loading
- External type foot pedal switch
- Iron cover arch (Optional)
- Equipped with brushes on the top & 2 sides of the iron arch covers to fix the strapping position (Optional)

### Specifications

|                                     |                                                           |
|-------------------------------------|-----------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 750 x 575 mm<br>(Iron Arch Cover)                         |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                   |
| <b>Strap Cycle Speed</b>            | 30 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 940 x 640 x 1500 mm (Standard)                            |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment)                 |
| <b>Tension Strength</b>             | 5 - 75 kg                                                 |
| <b>Table Height</b>                 | 830 mm                                                    |
| <b>Available Packing Size (WxH)</b> | 100-650 x 30-450 mm<br>Iron Arch Cover                    |
| <b>Net Weight</b>                   | 200 kg                                                    |
| <b>Sealing Method</b>               | Heat Sealing                                              |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX 940

**SKU:** M-60AX 940

### Fully Automatic Strapping Machine M-60AX 940

- Fully Automatic Strapping Machine M-60AX 940 has a retractable coil holder for easy coil loading
- Iron arch cover (Optional)

### Specifications

|                                     |                                                           |
|-------------------------------------|-----------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 800 x 600 mm<br>(Aluminium Arch Cover) (Standard)         |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                   |
| <b>Strap Cycle Speed</b>            | 30 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 940 x 640 x 1500 mm                                       |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment)                 |
| <b>Tension Strength</b>             | 5 - 75 kg                                                 |
| <b>Table Height</b>                 | 830 mm                                                    |
| <b>Available Packing Size (WxH)</b> | 100-700 x 30-500 mm<br>Aluminium Arch Cover               |
| <b>Net Weight</b>                   | 200 kg                                                    |
| <b>Sealing Method</b>               | Heat Sealing                                              |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX PR-3HT

**SKU:** M-60AX PR-3HT

### Fully Automatic Strapping Machine M-60AX PR-3HT

**Power Roller Table with Big Arch 1150W x 375H mm**

- Fully Automatic Strapping Machine M-60AX PR-3HT is suitable for various heavy products such as tiles, bricks, and so on
- 3 photocells Rod Yellow/Green warning lamp, and a buzzer
- Iron cover arch (Standard)
- The other deals were similar to M-60AXPB-2HL
- Brushes on the top and 2 sides of the Iron arch cover. (Optional)
- Embossed process on the power roller's surface (Optional)

### Specifications

|                                     |                                                              |
|-------------------------------------|--------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 1150 x 375 mm<br>(iron Arch Cover) Standard)                 |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                      |
| <b>Strap Cycle Speed</b>            | 25-27 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 1640 x 640 x 1285 mm                                         |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment)                    |
| <b>Tension Strength</b>             | 5 - 75 kg                                                    |
| <b>Table Height</b>                 | 823 mm                                                       |
| <b>Available Packing Size (WxH)</b> | 250-800 x 30 250mm                                           |
| <b>Net Weight</b>                   | 300 kg                                                       |
| <b>Sealing Method</b>               | Heat Sealing                                                 |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX-900D

**SKU:** M-60AX-900D

### Fully Automatic Strapping Machine M-60AX-900D

- Single front door type
- Retractable coil holder for easy coil loading
- Fixed foot pedal switch long side machine
- 900D 3 pieces of L-type carton holders on the top table to fix the strapping position
- Available for strapping money, mail, and tiny boxes, etc.
- Without any free rollers on the top table
- Iron arch cover (Optional)
- #32 tiny slide table to strap the tiny packages (Optional)
- Equipped with brushes on the top and 2 sides of the iron arch covers to fix the strapping position (Optional)

### Specifications for Fully Automatic Strapping Machine M-60AX-900D

|                                     |                                                           |
|-------------------------------------|-----------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 760 x 400 mm<br>(Aluminium Arch)                          |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                   |
| <b>Strap Cycle Speed</b>            | 30 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 900 x 640 x 1300 mm                                       |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustments)                |
| <b>Tension Strength</b>             | 5 - 75 kg                                                 |
| <b>Table Height</b>                 | 830 mm                                                    |
| <b>Available Packing Size (WxH)</b> | L160 X W80 x H120<br>(with #32 tiny side table)           |
| <b>Net Weight</b>                   | 200 kg                                                    |
| <b>Sealing Method</b>               | Heat Sealing                                              |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AXPR-2HT

**SKU:** M-60AXPR-2HT

### Fully Automatic Strapping Machine M-60AXPR-2HT

#### Power Roller Table with Arch 750W x575H mm (Standard)

- Power Roller Table with Arch 750W x 575H mm (Standard). Power Roller Table: It is easy to maintain by raised-up top cover.
- Equipped with two photocells (2HT), a safety 24, and a PLC electrical control system.
- The user can choose to strap for 1 strap, 2 straps, or no strap via the control panel it depending on the user's choice
- Supply a circuit to combine the input & output of the conveyors. 110W220V single-phase is available.
- The other details are as same as M-60AXPB-2HT

#### Specifications for Fully Automatic Strapping Machine M-60AXPR-2HT

|                                     |                                                              |
|-------------------------------------|--------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 750 x 575 mm<br>(Iron Arc Cover) (standard)                  |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                      |
| <b>Strap Cycle Speed</b>            | 25-27 Cycles / Min (60 HZ)<br>It depends on the package size |
| <b>Dimension (WxDxH)</b>            | 1240 x 650 x 1480 mm                                         |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustments)                   |
| <b>Tension Strength</b>             | 5 - 75 kg                                                    |
| <b>Table Height</b>                 | 815 mm                                                       |
| <b>Available Packing Size (WxH)</b> | 250-500 x 30-450 mm                                          |
| <b>Net Weight</b>                   | 247kg                                                        |
| <b>Sealing Method</b>               | Heat Sealing                                                 |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX-NM

**SKU:** M-60AX-NM

**Fully Automatic Strapping Machine M-60AX-NM**

**Arch: 600W x 400H mm (Standard)**

- Single front door type
- The medium size of the frame is suitable for strapping the tiny boxes, mail, newspapers, and magazines.
- Upgrade the AUTO-FEEDING system.
- To upgrade the Forwarding & Reversing System.
- The purpose is to speed up the strapping cycle.
- Each cycle is accurate and efficient. Fixed foot pedal switch long side machine
- Iron arch cover (Optional)
- The details are as same as M-60AXN

### Specifications for Fully Automatic Strapping Machine M-60AX-NM

|                                                                                      |                                             |
|--------------------------------------------------------------------------------------|---------------------------------------------|
|  |                                             |
| <b>Arch Size (WxH)</b>                                                               | 600 x 400 mm<br>(Aluminium Arch X standard) |
| <b>Power Supply</b>                                                                  | 110V/220V/1 Phase 220V380V/415V 3 Phase     |
| <b>Strap Cycle Speed</b>                                                             | 34-36 Cycles / Min (60 HZ)                  |
| <b>Dimension (WxDxH)</b>                                                             | 1040 x 500 x 1275 mm                        |
| <b>Strap Width</b>                                                                   | 6 - 15 mm<br>(Change kits and adjustments)  |
| <b>Tension Strength</b>                                                              | 5 - 75 kg                                   |
| <b>Table Height</b>                                                                  | 805 mm                                      |
| <b>Available Packing Size (WxH)</b>                                                  | 100-550 x 30-375 mm                         |
| <b>Net Weight</b>                                                                    | 170 kg                                      |
| <b>Sealing Method</b>                                                                | Heat Sealing                                |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)




## FULLY AUTOMATIC STRAPPING MACHINE M-60AX N5

**SKU:** M-60AX N5

### Fully Automatic Strapping Machine M-60AX N5

**Big Arch (1250W x 500H mm) (Iron Arch Cover) (Standard)**

- Available for 5mm P.P. strap
- Movable arch bandway design
- DC business motor technology
- Speedy, stable, and low-noisy design
- Fully Automatic Strapping Machine M-60AX N5 has a retractable coil holder for easy coil leading
- Fixed foot pedal switch long side machine
- Humanized design of the control panel



### Specifications

|                                     |                                              |
|-------------------------------------|----------------------------------------------|
| <b>Arch Size (WxH)</b>              | 250 x 500 mm<br>(Iron Arch Cover) (Standard) |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase      |
| <b>Strap Cycle Speed</b>            |                                              |
| <b>Dimension (WxDxH)</b>            | 1490 x 625 x 1410 mm                         |
| <b>Strap Width</b>                  | 5 mm                                         |
| <b>Tension Strength</b>             | 5 - 75 kg                                    |
| <b>Table Height</b>                 | 830 mm                                       |
| <b>Available Packing Size (WxH)</b> | 100-1550 x 30-450 mm                         |
| <b>Net Weight</b>                   |                                              |
| <b>Sealing Method</b>               | Heat Sealing                                 |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE M-60AXM

**SKU:** M-60AXM

### Fully Automatic Strapping Machine M-60AXM

**Arch: 600W x 400H mm (Standard)**

- The medium size of frame of M 6GAX is designed to strap tiny boxes, mails, newspapers and magazines.
- It is suitable to operate in your offices, post offices and so on.
- Fully Automatic Strapping Machine M-60AXM is suitable for strapping 6 mm of strap.
- Fully Automatic Strapping Machine M-60AXM is equipped with auto feeding function, instant heater function, internal foot pedal system and low noise operation etc. The main purpose is to make the operation more easily.
- With CKD frame and powder painting on frame and iron arch cover. Powder painting is only suitable for M-60AX & M-60AXM.
- Standard color on frame (Silver) and front control panel (Pigeon Blue)
- The other details are the same as the M-60AX.

### Specifications

|                                     |                                           |
|-------------------------------------|-------------------------------------------|
| <b>Arch Size (WxH)</b>              | 600 x 400 mm<br>(Aluminium Arch)          |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase   |
| <b>Strap Cycle Speed</b>            | 34-36 Cycles / Min (60 HZ)                |
| <b>Dimension (WxDxH)</b>            | 1040 x 500 x 1275 mm                      |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment) |
| <b>Tension Strength</b>             | 5 - 75 kg                                 |
| <b>Table Height</b>                 | 805 mm                                    |
| <b>Available Packing Size (WxH)</b> | 100-550 x 30-375 mm                       |
| <b>Net Weight</b>                   | 170 kg                                    |
| <b>Sealing Method</b>               | Heat Sealing                              |

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE M-60AXN

**SKU:** M-60AXN

### Fully Automatic Strapping Machine M-60AXN

The new M-60AXN is a modern concept of a fully automatic strapping machine with the upgrade Auto-feeding system for a dependable and reliable strapping application

- Fully Automatic Strapping Machine M-60AXN has 2 front doors type
- Upgrade the AUTO-FEEDING system to upgrade the Auto-Feeding system and the Forwarding & Reversing system. The purpose is to speed up the strapping cycle. Each cycle is accurate and efficient.
- JAM-FREE function: auto strap loops ejecting design to solve the strapping problem
- Fixed foot pedal switch long side machine
- Fully Automatic Strapping Machine M-60AXN is equipped with a patent aluminum alloy arch modular design: it is easy to assemble, disassemble, change size, economical, no arch motor is required (3rd Generation)
- Strep cycle can be done by a start switch, table ball switch and foot pedal ber
- Lift hype top cover allows convenient maintenance
- Iron arch cover (Optional)

### Specifications

|                                     |                                                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 800 x 600 mm<br>(Aluminium Arch Cover x Standard)                                      |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V380V/415V 3 Phase                                                |
| <b>Strap Cycle Speed</b>            | 32-35 Cycles / Min (50 HZ)<br>It depends on the package size and special requirements. |
| <b>Dimension (WxDxH)</b>            | 1240 x 625 x 1465                                                                      |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustment)                                              |
| <b>Tension Strength</b>             | 5 - 75 kg                                                                              |
| <b>Table Height</b>                 | 795 mm                                                                                 |
| <b>Available Packing Size (WxH)</b> | 100-750 x 30-550 mm                                                                    |
| <b>Net Weight</b>                   | Approx 200 kg                                                                          |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

**Sealing Method**

Heat Sealing

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE M-60AX

**SKU:** M-60AX

### Fully Automatic Strapping Machine M-60AX

**800W X 600H mm (Aluminum Arch) (Standard)**

- Innovatory AUTO-FEEDING Function: to press the "INSERT button, the strap will be fed automatically and be ready for the first strapping cycle applicao
- Auto positioning and retry function: to ensure the strap goes to its proper position, and every cycle is accurate and efficient
- JAM-FREE function auto stap loops ejecting design to correct strapping problems
- Electronic tensioning: to get optional 5-75 ky tension strength by adjusting the tension knob
- Internal foot pedal system: strap cycle will be completed more easily
- Fully Automatic Strapping Machine M-60AX is equipped with a patent aluminum alloy arch modular design, it is easy to assemble, disassemble, and change size economically; no arch motor is required (3rd Generation)
- A strap cycle can be done by a start switch, a label ball switch, and a foot pedal bar.
- With the motor's auto-stop function
- Fully Automatic Strapping Machine M-60AX has a lift-type top cover that allows convenient maintenance.

### Specifications

|                                     |                                                                               |
|-------------------------------------|-------------------------------------------------------------------------------|
| <b>Arch Size (WxH)</b>              | 800 x 600 mm (Aluminium Arch)                                                 |
| <b>Power Supply</b>                 | 110V/220V/1 Phase 220V/380V/415V 3 Phase                                      |
| <b>Strap Cycle Speed</b>            | 32-35 Cycles / Min (60 HZ)                                                    |
| <b>Dimension (WxDxH)</b>            | 1240 x 500 x 1475mm                                                           |
| <b>Strap Width</b>                  | 6 - 15 mm<br>(Change kits and adjustments)                                    |
| <b>Tension Strength</b>             | 5 - 75 kg                                                                     |
| <b>Table Height</b>                 | 805 mm                                                                        |
| <b>Available Packing Size (WxH)</b> | 100-750 x 30-575 mm (Aluminium Arch)<br>100-700 x 30-550 mm (Iron Arch Cover) |
| <b>Net Weight</b>                   | App 100 kg                                                                    |
| <b>Sealing Method</b>               | Heat Sealing                                                                  |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

**Categories:** [Fully Automatic Strapping Machine M-60 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or [ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

# FULLY AUTOMATIC STRAPPING MACHINE NS3A SERIES

## FULLY AUTOMATIC STRAPPING MACHINE NS-3ADMS

**SKU:** NS-3ADMS

**Fully Automatic Strapping Machine NS-3ADMS Medium-Sized Model  
with Stainless Steel Frame**



- Fully Automatic Strapping Machine NS-3ADMS allows for an easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3ADMS allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3ADMS is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

### Specifications



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Strap Cycle Speed</b>    | <b>2 sec./cycle</b>                  |
| <b>Tension Strength</b>     | <b>1.5-60 kg</b>                     |
| <b>Table Height</b>         | <b>760mm</b>                         |
| <b>Strap Width</b>          | <b>5-15.5mm</b>                      |
| <b>Sealing Method</b>       | <b>Heat Sealed</b>                   |
| <b>Electric Consumption</b> | <b>200W</b>                          |
| <b>Power Supply</b>         | <b>110/220V 50/60Hz Single phase</b> |
| <b>Dimensions</b>           | <b>860W x 570D x 750H mm</b>         |
| <b>Net Weight</b>           | <b>86kg</b>                          |
| <b>Max Packing Size</b>     |                                      |

**Categories:** [Strapping Machine](#), [Fully Automatic Strapping Machine NS3A Series](#)




**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE NS-3AL LOW TABLED MODEL

**SKU:** NS-3AL

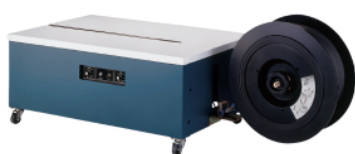

### Fully Automatic Strapping Machine NS-3AL Low Tabled Model

- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3AL allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3AL is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

### Specifications

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Strap Cycle Speed</b>    | <b>2 sec./cycle</b>                  |
| <b>Tension Strength</b>     | <b>4-80 kg</b>                       |
| <b>Table Height</b>         | <b>400mm</b>                         |
| <b>Strap Width</b>          | <b>5-15.5mm</b>                      |
| <b>Sealing Method</b>       | <b>Heat Sealed</b>                   |
| <b>Electric Consumption</b> | <b>200W</b>                          |
| <b>Power Supply</b>         | <b>110/220V 50/60Hz Single phase</b> |
| <b>Dimensions</b>           | <b>1530W x 610D x 400H mm</b>        |
| <b>Net Weight</b>           | <b>86kg</b>                          |
| <b>Max Packing Size</b>     |                                      |

**Categories:** [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE NS-3ADM MEDIUM-SIZED MODEL

**SKU:** NS-3ADM

### Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model

- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3ADM allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3ADM is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

### Specifications

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Strap Cycle Speed</b>    | <b>2 sec./cycle</b>                  |
| <b>Tension Strength</b>     | <b>1.5-60 kg</b>                     |
| <b>Table Height</b>         | <b>750mm</b>                         |
| <b>Strap Width</b>          | <b>5-15.5mm</b>                      |
| <b>Sealing Method</b>       | <b>Heat Sealed</b>                   |
| <b>Electric Consumption</b> | <b>200W</b>                          |
| <b>Power Supply</b>         | <b>110/220V 50/60Hz Single phase</b> |
| <b>Dimensions</b>           | <b>860W x 570D x 750H mm</b>         |
| <b>Net Weight</b>           | <b>86kg</b>                          |
| <b>Max Packing Size</b>     |                                      |

**Categories:** [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING MACHINE NS-3AD STANDARD MODEL

**SKU:** NS-3AD

### Fully Automatic Strapping Machine NS-3AD Standard Model

- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3AD allows for easy changing of the strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3AD is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

### Specifications

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Strap Cycle Speed</b>    | <b>2 sec./cycle</b>                  |
| <b>Tension Strength</b>     | <b>4-80 kg</b>                       |
| <b>Table Height</b>         | <b>760mm</b>                         |
| <b>Strap Width</b>          | <b>5-15.5mm</b>                      |
| <b>Sealing Method</b>       | <b>Heat Sealed</b>                   |
| <b>Electric Consumption</b> | <b>200W</b>                          |
| <b>Power Supply</b>         | <b>110/220V 50/60Hz Single phase</b> |
| <b>Dimensions</b>           | <b>1400W x 640D x 1740H mm</b>       |
| <b>Net Weight</b>           | <b>110kg</b>                         |
| <b>Max Packing Size</b>     |                                      |

**Categories:** [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or [ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

# FULLY AUTOMATIC STRAPPING SYSTEM JN-85 SERIES



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 APN

**SKU:** JN-85 APN

**Fully Automatic Strapping System JN-85 APN**

**Light-duty Air-pressure**

- Mono-strapping with air-pressing bar which is suitable for carton/ paperboard or pre-transported forming-case strapping.
- The arch size is optional to fit various package sizes.
- According to requirements, Fully Automatic Strapping System JN-85 APN additional functions such as heavier pressure or delay strapping is available

### Specifications

|                          |                                                      |
|--------------------------|------------------------------------------------------|
| <b>Arch Size</b>         | 850W x 600H mm (Standard)                            |
| <b>Power Supply</b>      | 110/220V 50/60Hz 1 Phase<br>220/380V 50/60Hz 3 Phase |
| <b>Strap Cycle Speed</b> | 8 Sec/Cycle                                          |
| <b>Tension Strength</b>  | Max. 70 kgs                                          |
| <b>Sealing Method</b>    | Heat Sealing                                         |
| <b>Cylinder</b>          | Inner Diameter; 040                                  |
| <b>Pressure</b>          | 5 kg/cm (Bar)                                        |
| <b>Stroke</b>            | 550mm                                                |
| <b>Dimensions</b>        | 1450W x 640D x 2140H mm (Standard)                   |
| <b>Table Height</b>      | 810mm                                                |
| <b>Machine Weight</b>    | 315 kgs                                              |
| <b>Gross Weight</b>      | 432 kgs                                              |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 OP

**SKU:** JN-85 OP

### Fully Automatic Strapping System JN-85 OP

#### Oil-Pressure

- It is suitable to strap expensive packages such as canvas bags, dustproof bags and corrugated boards and so on.
- Fully Automatic Strapping System JN-85 OP is equipped with 5 HP Oil Compression System and with stronger external frame structure to provide 2.5 Ton of pressure.

#### Specifications

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| <b>Arch Size</b>        | 850W x 800H mm (Standard)                         |
| <b>Power Supply</b>     | 110/220V 50/60Hz 1 Phase<br>220/380V/415V 3 Phase |
| <b>Tension Strength</b> | Max 70 kg                                         |
| <b>Strap Width</b>      | 9.15mm (Change kits and adjustment)               |
| <b>Sealing Method</b>   | Heat Sealing                                      |
| <b>Dimensions</b>       | 1760W x 640D x 2700H mm (Standard)                |
| <b>Table Height</b>     | 815mm                                             |
| <b>Oil Cylinder</b>     | 050 x 750L mm per piece (2 pieces/machine)        |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 PRAPN

**SKU:** JN-85 PRAPN

### Fully Automatic Strapping System JN-85 PRAPN

#### Power Roller Table with Light-duty Air pressure

- Mono-strapping with air-pressing bar which is suitable for carton/ paperboard or pre-transported forming-case strapping.
- The arch size is optional to fit various package sizes.
- According to requirements, additional functions such as heavier pressure or delay strapping is available.
- Fully Automatic Strapping System JN-85 PRAPN is equipped with a Table Roller Cover.

### Specifications

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| <b>Arch Size</b>      | 1650W x 600H mm (Standard)                      |
| <b>Power Supply</b>   | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| <b>Strap Width</b>    | 9- 15.5mm                                       |
| <b>Sealing Method</b> | Heat Sealing                                    |
| <b>Cylinder</b>       | Inner Diameter: 040                             |
| <b>Pressure</b>       | 5 kg/cm2 (Bar)                                  |
| <b>Stroke</b>         | 550mm                                           |
| <b>Dimensions</b>     | 2350W x 800D x 2300H mm                         |
| <b>Table Height</b>   | 815mm                                           |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 PRU

**SKU:** JN-85 PRU

### Fully Automatic Strapping System JN-85 PRU


#### Standard Power RollerTable

- Standardized power roller table model with 2 sets of photocell JN-85PRU-2HT.
- Optional straps No. is available for 1, 2 or no strapping on the packages. More straps application is also available as an option before order is fixed.
- This model can incorporate input and output conveyors as a strapping system. The control system of conveyors can be connected with this model.
- An optional photocell to control the table transmitting is available, which can auto-stop the table when no package is input.
- Fully Automatic Strapping System JN-85 PRU is equipped with Table Roller Cover.

#### Specifications

|                           |                                                 |
|---------------------------|-------------------------------------------------|
| <b>Arch Size</b>          | 850W x 600H mm (Standard)                       |
| <b>Power Supply</b>       | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| <b>Strap Cycle Speed</b>  | 2.5 Sec/cycles                                  |
| <b>Tension Strength</b>   | Max. 70kg                                       |
| <b>Strap Width</b>        | 9- 15.5mm                                       |
| <b>Sealing Method</b>     | Heat Sealing                                    |
| <b>Dimensions</b>         | 1550W x 800D x 1470H mm                         |
| <b>Table Height</b>       | 815mm                                           |
| <b>Machine Weight</b>     | 330 kgs                                         |
| <b>Gross Weight</b>       | 430 kgs                                         |
| <b>Power Roller Speed</b> | 15M/50Hz Per Min.                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 LPBU

**SKU:** JN-85 LPBU

### Fully Automatic Strapping System JN-85 LPBU

#### Low Table Power Belt Model

- Low power belt table with standard table height H450 or H500mm. Optional height for incorporating with a conveyor is also available. (Optional)
- Fully Automatic Strapping System JN-85 LPBU is equipped with 2 sets of photocells to work with conveyors is available JN-85LPB-2HT.
- Refer to JN-85PBU for rest features

#### Specifications

|                          |                                                 |
|--------------------------|-------------------------------------------------|
| <b>Arch Size</b>         | 850W x 600H mm (Standard)                       |
| <b>Power Supply</b>      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| <b>Strap Cycle Speed</b> | 2.5 Sec/cycles                                  |
| <b>Tension Strength</b>  | Max. 70kg                                       |
| <b>Strap Width</b>       | 9- 15.5mm                                       |
| <b>Sealing Method</b>    | Heat Sealing                                    |
| <b>Dimensions</b>        | 1940W x 640D x 1670H mm                         |
| <b>Table Height</b>      | 455mm or 505mm                                  |
| <b>Machine Weight</b>    | 307 kgs                                         |
| <b>Gross Weight</b>      | 402 kgs                                         |
| <b>Power Belt Speed</b>  | 17M/50Hz Per Min.                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 PBU

**SKU:** JN-85 PBU

### Fully Automatic Strapping System JN-85 PBU

#### Standard Power Belt Table

- Fully Automatic Strapping System JN-85 PBU has a standardized power belt table model with 2 sets of photocells.
- Optional straps No. is available for 1, 2 or no strapping on the packages. More straps application is also available as an option before order is fixed.
- This model can incorporate input and output conveyors as a strapping system. The control system of conveyors can be connected with this model.
- An optional photocell to control the table transmitting is available, which can auto-stop the table when no package is input.

#### Specifications

|                          |                                                 |
|--------------------------|-------------------------------------------------|
| <b>Arch Size</b>         | 850W x 600H mm (Standard)                       |
| <b>Power Supply</b>      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| <b>Strap Cycle Speed</b> | 2.5 Sec/cycles                                  |
| <b>Tension Strength</b>  | Max. 70kg                                       |
| <b>Strap Width</b>       | 6- 15.5mm                                       |
| <b>Sealing Method</b>    | Heat Sealing                                    |
| <b>Dimensions</b>        | 1550W x 640D x 1550H mm                         |
| <b>Table Height</b>      | 825mm                                           |
| <b>Machine Weight</b>    | 307 kgs                                         |
| <b>Gross Weight</b>      | 402 kgs                                         |
| <b>Power Belt Speed</b>  | 17M/50Hz Per Min.                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 LPRU

**SKU:** JN-85 LPRU

### Fully Automatic Strapping System JN-85 LPRU

#### Low Table Power Roller Model

- Lower power roller table with standard table height H450 or H500mm.
- Optional height for incorporating with a conveyor is also available.(Optional)
- Fully Automatic Strapping System JN-85 LPRU is equipped with 2 photocells to work with conveyors is available JN-85LPRU-2HT.
- Refer to JN-85PRU for rest features.
- Equipped with Table Roller Cover

#### Specifications


|                           |                                                 |
|---------------------------|-------------------------------------------------|
| <b>Arch Size</b>          | 850W x 600H mm (Standard)                       |
| <b>Power Supply</b>       | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph; |
| <b>Strap Cycle Speed</b>  | 2.5 Sec/cycle                                   |
| <b>Tension Strength</b>   | Max. 70kg                                       |
| <b>Strap Width</b>        | 6- 15.5mm                                       |
| <b>Sealing Method</b>     | Heat Sealing                                    |
| <b>Dimensions</b>         | 1940W x 800D x 1670H mm                         |
| <b>Table Height</b>       | 455mm or 505mm                                  |
| <b>Machine Weight</b>     | 307 kgs                                         |
| <b>Gross Weight</b>       | 402 kgs                                         |
| <b>Power Roller Speed</b> | 15M/50Hz Per Min.                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

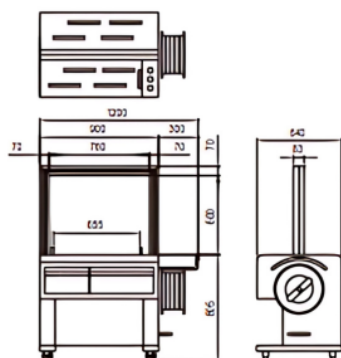

## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 EM

**SKU:** JN-85 EM

### Fully Automatic Strapping System JN-85 EM

The Fully Automatic Strapping System JN-85 EM Compact Model is designed to optimize packaging processes. This compact model not only enhances efficiency but also saves valuable space in your operational area. It's an ideal solution for businesses looking to streamline their strapping operations without compromising on performance.

### Minimized Model

In today's fast-paced industrial environment, having a minimized model can significantly improve workflow. The JN-85 EM Compact Model is particularly beneficial in factories or warehouses where space is at a premium. With its compact design, it can fit seamlessly into existing production lines, ensuring that productivity is maintained.

- Minimized model of JN-85U by width and height 200mm, Fully Automatic Strapping System JN-85 EM is suitable for smaller working space and for smaller packages strapping.

For instance, a company that relies on frequent shipping of smaller packages can benefit from the minimized model of the JN-85 EM. By utilizing this equipment, they can strap items more efficiently, thereby speeding up their packing process and reducing the risk of damage during transit.

- If a customer requires an optional size smaller than 650W x 400 Hmm is available.

Additionally, for specific industries such as e-commerce or food packaging, the option to customize the size of the JN-85 EM Compact Model less than the standard 650W x 400H mm can cater to unique packaging needs. This adaptability ensures that various product sizes can be handled with ease, maximizing operational flexibility.

- With CKD frame and powder painting on frame.

The CKD (Complete Knock Down) frame is a noteworthy feature. It allows for easy transport and assembly, making the Fully Automatic Strapping System JN-85 EM an attractive option for businesses that may need to relocate their operations or expand into new facilities. The powder painting on the frame not only enhances durability but also provides a clean, professional appearance.

- Change color on the iron arch cover, front doors & frame is



available. (Optional)

Moreover, changing the color of the iron arch cover, front doors, and frame can provide a customized touch, allowing businesses to maintain brand consistency in their equipment. This feature is often appreciated by companies looking to present a cohesive image to their clients.

### Specifications

Understanding the specifications is crucial for selecting the right strapping system. The Fully Automatic Strapping System JN-85 EM's arch size of 650W x 400H mm is designed to accommodate a wide range of products, making it versatile for various applications in different industries.


For example, companies in the manufacturing sector may require strapping for assembled goods, while retailers may need it for packaging retail items. The adaptability of the arch size ensures that it meets the demands of diverse packaging requirements, enhancing operational efficiency.

Furthermore, the standard arch size allows for quick adjustments and easy use, which is essential in high-volume production settings. Operators will find that the learning curve for utilizing this equipment is minimal, allowing for rapid deployment in various environments.

|                  |                           |
|------------------|---------------------------|
| <b>Arch Size</b> | 650W x 400H mm (Standard) |
|------------------|---------------------------|

In conclusion, the Fully Automatic Strapping System JN-85 EM Compact Model stands out as a practical solution for businesses aiming to improve their packaging processes. With its minimized design, customizable options, and robust specifications, it aligns perfectly with modern operational needs. Investing in such a system not only enhances productivity but also contributes to overall business growth.

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)

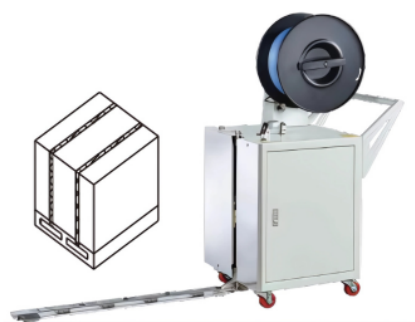

## SEMI-AUTOMATIC PALLET STRAPPING MACHINE JN-85 PS

**SKU:** JN-85 PS

### Semi-automatic pallet strapping machine JN-85 PS

- The Semi-automatic pallet strapping machine is suitable for various packaging needs, making it a versatile choice for many industries, including logistics, manufacturing, and retail.
- Used various requirements when packaging cargo on pallets.
- Moveable design of this model provides convenient operation, especially for delicate working places with manual lifts where cranes cannot reach.
- This model's moveable design allows for flexible operations, enabling the machine to be used in tight spaces where other machinery may not fit, thereby maximizing the use of available workspace.

The Semi-automatic pallet strapping machine is an essential tool in the packaging industry, designed to optimize and streamline the process of securing goods on pallets. With growing demands for efficient packaging solutions, investing in such machinery can significantly influence productivity and operational efficiency.

The Semi-automatic pallet strapping machine is particularly designed to handle varying requirements for packaging cargo on pallets, making it adaptable for different types of goods, from fragile items that require gentle handling to heavy-duty products that need robust securing methods.

### Specifications

#### Importance of Choosing the Right Packaging Equipment

#### Benefits of Using a Semi-automatic Pallet Strapping Machine

|                              |                    |
|------------------------------|--------------------|
| <b>Strap Guide Length</b>    | 1000 mm (Standard) |
| <b>Min. Packaging Height</b> | 550 mm             |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 SE

**SKU:** JN-85 SE

### Fully Automatic Strapping System JN-85 SE


#### Stainless Steel Frame

- This model is made for strapping on wet packages and in a high moisture environment.
- The frame and most of the parts are made of stainless steel such as screws and some hardware.
- The dispenser discs are made of ABS and equipped with rust-free patented Aluminum alloy made modular arch

#### Specifications

|                          |                                                                         |
|--------------------------|-------------------------------------------------------------------------|
| <b>Arch Size</b>         | 850W x 600H mm (Standard)                                               |
| <b>Power Supply</b>      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3 Ph;                         |
| <b>Strap Cycle Speed</b> | 28 Cycles/60Hz, 26 cycles/50Hz per Min (It depends on the package size) |
| <b>Tension Strength</b>  | Max. 70kg                                                               |
| <b>Strap Width</b>       | 6- 15.5mm                                                               |
| <b>Sealing Method</b>    | Heat Sealing                                                            |
| <b>Dimensions</b>        | 1400W x 640D x 1475H mm                                                 |
| <b>Table Height</b>      | 810mm                                                                   |
| <b>Machine Weight</b>    | 220kgs                                                                  |
| <b>Gross Weight</b>      | 265kgs                                                                  |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)

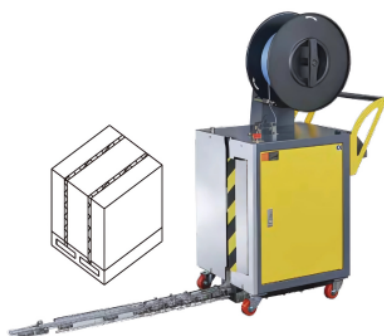

## SEMI-AUTO PALLET STRAPPING MACHINE JN-85 PSA

**SKU:** JN-85 PSA

**Semi-auto Pallet Strapping Machine JN-85 PSA**

**Semi-auto Pallet Strapping Machine with Mobile Strap Guide**

- Mobile Strap Guide
- Available for various products on pallet
- Dispenser core inner dia.: Ø200 mm (Standard)
- Mini. package height: H630 mm
- Available for PET strap (Optional)
- Available for Dispenser core inner dia.: Ø406 mm (Optional)

### Specifications

|                             |                                            |
|-----------------------------|--------------------------------------------|
| <b>Strap guide (Length)</b> | L 1000 mm (Standard)                       |
| <b>Power Supply</b>         | 110/220V 1 Phase;<br>220/380V/415V 3 Phase |
| <b>Dimension</b>            | 870W x 540D x 1380H mm                     |
| <b>Tension Strength</b>     | Max. 70kg                                  |
| <b>Strap Width</b>          | 12- 15 mm (Change kit and adjustment)      |
| <b>Sealing Method</b>       | Heat Sealing                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 ZE

**SKU:** JN-85 ZE

### Fully Automatic Strapping System JN-85 ZE

#### Outside Tension Model

- Outside Tension Adjustment: it is easy to adjust the tension via Tension Knob.
- Automatic positioning and re-try functions: to secure the strap goes to its proper position and every cycle is accurate and efficient.
- Fully Automatic Strapping System JN-85 ZE is controlled by P.C. Board with multiple functions.
- ABS Dispenser. (Optional)
- Basic functions are the same as JN-85E.
- With CKD frame and powder painting on a frame.
- Change color on the iron arch cover, front doors & frame is available.(Optional)

#### Specifications

|                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| <b>Arch Size</b>              | 850W x 600H mm (Standard)<br>(Aluminum arc cover)           |
| <b>Power Supply</b>           | 110/220V 1 Phase;<br>220/380V/415V 3 Phase                  |
| <b>Strap Cycle Speed</b>      | 28-30 Cycles / Min. (60Hz) (It depends on the package size) |
| <b>Tension Strength</b>       | Max. 70kg                                                   |
| <b>Strap Width</b>            | 6- 15 mm (Change kits and adjustment)                       |
| <b>Sealing Method</b>         | Heat Sealing                                                |
| <b>Dimensions</b>             | 1400W x 640D x 1475H mm (Standard)                          |
| <b>Table Height</b>           | 810mm                                                       |
| <b>Machine Weight</b>         | 220kgs                                                      |
| <b>Available Packing Size</b> | 100-825W x 30-580H mm                                       |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 E

**SKU:** JN-85 E

### Fully Automatic Strapping System JN-85 E

#### Standard Model

- Modular designed Aluminum alloy arch, easy to assemble and disassemble.
- Auto strap positioning and retry feeding functions enable the operation of humanity.
- Convenient operating modes with panel, ball switch and foot pedal switch.
- Internal electricity is 24V accessible, preventing operators from shocking.
- With CKD frame and powder painting on frame. Change color on the iron arch cover, front doors & frame is available. (Optional)

#### Specifications

|                          |                                               |
|--------------------------|-----------------------------------------------|
| <b>Arch Size</b>         | 850W x 600H mm (Optional)                     |
| <b>Power Supply</b>      | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3Ph |
| <b>Strap Cycle Speed</b> | 28 Cycles 60Hz, 26 cycles/ 50Hz per Min       |
| <b>Tension Strength</b>  | Max. 70kgs                                    |
| <b>Strap Width</b>       | 6- 15.5mm                                     |
| <b>Sealing Method</b>    | Heat Sealing                                  |
| <b>Dimensions</b>        | 1400W x 640D x 1475H mm                       |
| <b>Table Height</b>      | 810mm                                         |
| <b>Machine Weight</b>    | 220kgs                                        |
| <b>Gross Weight</b>      | 265kgs                                        |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## FULLY AUTOMATIC STRAPPING SYSTEM JN-85 PBAPN

**SKU:** JN-85 PBAPN

**Fully Automatic Strapping System JN-85 PBAPN**

### Pre-arrange, positioning Functions Enclosed

- Accessed in Magazines or Catalogs publishing line, which is suitable for strapping on the printed catalogs or papers with pre-arranging and pressing bar.
- In order to fit with various-sized publications, this system can be adjusted for different strapping positions.
- This system is usually incorporated with the transporting and strapping of publications before binding is complete.

### Specifications

|                         |                                               |
|-------------------------|-----------------------------------------------|
| <b>Arch Size</b>        | 650W x 400H mm (Optional)                     |
| <b>Power Supply</b>     | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3Ph |
| <b>Tension Strength</b> | Max. 70kgs                                    |
| <b>Strap Width</b>      | 6- 15.5mm                                     |
| <b>Sealing Method</b>   | Heat Sealing                                  |
| <b>Cylinder</b>         | Inner Diameter. 040                           |
| <b>Pressure</b>         | 5kg/cm <sup>2</sup> (Bar)                     |
| <b>Table Height</b>     | 825mm                                         |
| <b>Max Packing Size</b> | 300W x 350H mm                                |
| <b>Min Packing Size</b> | 120W x 100H mm.                               |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



## FULLY AUTOMATIC STRAPPING MACHINE – JN-85 PBTAPN

**SKU:** N/A

### Fully Automatic Strapping Machine – JN-85 PBTAPN

Power Belt Table with Light-Duty Air Pressure

- Suitable for bigger carton/paperboard or pre-transported forming-case strapping
- Fully Automatic Strapping Machine is equipped with 2 sets of photocell and light-duty air-pressing bar.
- Refer to JN-85PRAPN for the rest of the features.
- With Red /Yellow ? Green Warning Lamp & Buzzer

### Specifications

|                         |                                               |
|-------------------------|-----------------------------------------------|
| <b>Action Size</b>      | 1050W x 600H mm (Optional)                    |
| <b>Power Supply</b>     | 110/220V 50/60Hz 1Ph;<br>220/380V 50/60Hz 3Ph |
| <b>Strap Width</b>      | 9 – 15.5mm                                    |
| <b>Sealing Method</b>   | Heat Sealing                                  |
| <b>Cylinder</b>         | Inner Diameter. 040                           |
| <b>Pressure</b>         | 5kg/cm2 (Bar)                                 |
| <b>Stroke</b>           | 550mm                                         |
| <b>Table Height</b>     | 815mm                                         |
| <b>Max Packing Size</b> | 1000W x 560H mm                               |
| <b>Min Packing Size</b> | 300W x 100H mm                                |

**Categories:** [Fully Automatic Strapping System JN-85 Series](#), [Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

# SEMI-AUTOMATIC STRAPPING MACHINE JN-740-SERIES



## SEMI-AUTOMATIC STRAPPING MACHINE JN-740DH

**SKU:** JN- 740DH

### Semi-Automatic Strapping Machine JN- 740DH

- Front door opening design makes loading and unloading dispensers more convenient.
- Semi-Automatic Strapping Machine JN- 740DH provides instant heating in 20 seconds.
- Economical design of control switch, independent PCB controls feeding, tensioning and heating.
- External adjustable tension knob provides simple operation (optional).
- Energy saving mode activates within 15 seconds of non-use and allows for instant operation.
- Innovatory die-cast seal blade eliminates blade distortion, short circuiting and rapid aging that are common in many conventional strapping machines.
- Easier changeover of straps suitable for 6~15mm strap width through strap guide.

### Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                    |
| <b>Tension Strength</b>  | 15-60 kgs/Max.                   |
| <b>Table Height</b>      | 735mm                            |
| <b>Strap Width</b>       | 6- 15mm                          |
| <b>Sealing Method</b>    | Heat Sealing                     |
| <b>Min. Package Size</b> | 60mm                             |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase    |
| <b>Dimensions</b>        | 895W x 570D x 735H mm (Standard) |
| <b>Machine Weight</b>    | 95 kgs                           |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

**Gross Weight**

120 kgs

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series,](#)  
[Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## SEMI-AUTOMATIC STRAPPING MACHINE JN-740

**SKU:** JN- 740

### Semi-Automatic Strapping Machine JN- 740

- Semi-Automatic Strapping Machine JN- 740 provides instant heating in 20 seconds
- Economical design of control switch, independent PCB controls feeding, tensioning and heating.
- External adjustable tension knob provides simple operation (optional).
- Energy saving mode activates within 15 seconds of non-use and allows for instant operation.
- Innovatory die-cast seal blade eliminates blade distortion, short circuiting and rapid aging that are common in many conventional strapping machines.
- Easier changeover of straps suitable for 6~15mm strap width through strap guide.
- Stainless steel frame is available for strapping humid products.

### Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                    |
| <b>Tension Strength</b>  | 15-60 kgs/Max.                   |
| <b>Table Height</b>      | 735mm                            |
| <b>Strap Width</b>       | 6- 15mm                          |
| <b>Sealing Method</b>    | Heat Sealing                     |
| <b>Min. Package Size</b> | 60mm                             |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase    |
| <b>Dimensions</b>        | 895W x 570D x 735H mm (Standard) |
| <b>Machine Weight</b>    | 95 kgs                           |
| <b>Gross Weight</b>      | 120 kgs                          |

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series](#),  
[Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## SEMI-AUTOMATIC STRAPPING MACHINE JN-700

**SKU:** JN- 700

### Semi-Automatic Strapping Machine JN- 700

- Semi-Automatic Strapping Machine JN- 700 provides instant heating in only 20 seconds.
- One-touch machine operation.
- Energy saving mode activates within 15 seconds of non-use and allows for instant operation.
- Simple adjustment of strap guides allows for the strap width setting of 6mm to 15mm. All electric parts are installed on independent circuit boards.
- All electric controls utilize DC 24V to ensure safety.

### Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                    |
| <b>Tension Strength</b>  | 65 kgs/Max.                      |
| <b>Table Height</b>      | 730mm                            |
| <b>Strap Width</b>       | 6- 15mm                          |
| <b>Sealing Method</b>    | Heat Sealing                     |
| <b>Min. Package Size</b> | 60mm                             |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase    |
| <b>Dimensions</b>        | 895W x 570D x 730H mm (Standard) |
| <b>Machine Weight</b>    | 100 kgs                          |
| <b>Gross Weight</b>      | 120 kgs                          |

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series, Strapping Machine](#)



## SEMI-AUTOMATIC STRAPPING MACHINE JN-600

**SKU:** JN- 600

### Semi-Automatic Strapping Machine JN- 600

- Semi-Automatic Strapping Machine JN- 600 is designed for easy operation.
- Energy saving mode activates within 15 seconds of non-use and allows for instant operation.
- Lift type top cover allows convenient maintenance.
- External adjustable tension knob provides simple operation (optional).
- Easier changeover of straps suitable for 6~15mm strap width through strap guides.
- Internal power of DC 24V eliminates shock and prolongs machine life.
- Optional installation for different needs:
- Stainless steel frame is available for strapping humid

1. Exchange of brake wheels available.
2. 730~830mm height adjustable.

### Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                    |
| <b>Tension Strength</b>  | 65 kgs/Max.                      |
| <b>Table Height</b>      | 730mm                            |
| <b>Strap Width</b>       | 6- 15mm                          |
| <b>Sealing Method</b>    | Heat Sealing                     |
| <b>Min. Package Size</b> | 60mm                             |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase    |
| <b>Dimensions</b>        | 895W x 570D x 730H mm (Standard) |
| <b>Machine Weight</b>    | 100 kgs                          |
| <b>Gross Weight</b>      | 120 kgs                          |

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series, Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## SEMI-AUTOMATIC STRAPPING MACHINE JN-600VS

**SKU:** JN- 600VS

### Semi-Automatic Strapping Machine JN- 600VS

- Internal power of DC 24V eliminates shock and prolongs machine life.
- Vertical side-seal head to minimize dust, water or any contamination in the machine.
- Semi-Automatic Strapping Machine JN- 600VS has an adjustable 20-step table height from 450~850mm, increases variety of package sizes and eliminates the need for tools.
- Use of a changeable circuit board provides easy replacement and the side-seal head ensures safe, easy maintenance.
- Optional installation for different needs:
  1. Use of stainless steel rollers to forward and reverse strap feed.
  2. Enlarged working table.
  3. Stainless steel castors instead of standard.
  4. Installation of internal lamp to keep cabinet dry.

### Specifications

|                          |                                    |
|--------------------------|------------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                      |
| <b>Tension Strength</b>  | 65 kgs                             |
| <b>Table Height</b>      | 450~850mm                          |
| <b>Strap Width</b>       | 6- 15mm                            |
| <b>Sealing Method</b>    | Heat Sealing                       |
| <b>Cylinder</b>          | Inner Diameter; 040                |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase      |
| <b>Dimensions</b>        | 675W x 1045D x 1720H mm (Standard) |
| <b>Machine Weight</b>    | 130 kgs                            |
| <b>Gross Weight</b>      | 192 kgs                            |

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series, Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or [ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## SEMI-AUTOMATIC STRAPPING MACHINE JN-7MINI-B

**SKU:** JN- 7mini-B

### Semi-Automatic Strapping Machine JN- 7mini-B

- Semi-Automatic Strapping Machine JN- 7mini-B is suitable for light tension packaging in 6~15mm strap width.
- Energy saving mode activates within 15 seconds of non-use and allows for instant operation.
- Lift type top cover allows for convenient maintenance.
- Easy external adjustable tension knob from 15~45kgs

### Specifications

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Strap Cycle Speed</b> | 1.5 Sec/Cycle                    |
| <b>Tension Strength</b>  | 15~45 kgs                        |
| <b>Table Height</b>      | 790mm                            |
| <b>Strap Width</b>       | 6.9,12, 15mm                     |
| <b>Sealing Method</b>    | Heat Sealed                      |
| <b>Cylinder</b>          | Inner Diameter; 040              |
| <b>Power Supply</b>      | 110/220v 50/60Hz single phase    |
| <b>Dimensions</b>        | 640W x 420D x 790H mm (Standard) |
| <b>Machine Weight</b>    | 72 kgs                           |
| <b>Gross Weight</b>      | 90- kgs in wood case             |

**Categories:** [Semi-Automatic Strapping Machine JN-740-Series](#),  
[Strapping Machine](#)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
[ovi@quick3pl.com](mailto:ovi@quick3pl.com)



**QUICK 3PL**  
LOGISTICS SIMPLIFIED



## INDEX

### F

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| Fully Automatic Strapping Machine JN-85 PPRAP                         | 8  |
| Fully Automatic Strapping Machine JN-85 WHM                           | 10 |
| Fully Automatic Strapping Machine JN-85Y RS                           | 6  |
| Fully Automatic Strapping Machine JN-85Y S-2HT                        | 3  |
| Fully Automatic Strapping Machine JN-85Y U                            | 7  |
| Fully Automatic Strapping Machine JN-85Y U Big Arch Model             | 4  |
| Fully Automatic Strapping Machine JN-85Y U-4HT                        | 5  |
| Fully Automatic Strapping Machine JN-85Y UDH with Double Sealing Head | 1  |
| Fully Automatic Strapping Machine M-60AX                              | 26 |
| Fully Automatic Strapping Machine M-60AX 940                          | 16 |
| Fully Automatic Strapping Machine M-60AX 940D                         | 15 |
| Fully Automatic Strapping Machine M-60AX N5                           | 21 |
| Fully Automatic Strapping Machine M-60AX PB-2HT                       | 12 |
| Fully Automatic Strapping Machine M-60AX PR-3HT                       | 17 |
| Fully Automatic Strapping Machine M-60AX-900D                         | 18 |
| Fully Automatic Strapping Machine M-60AX-NM                           | 20 |
| Fully Automatic Strapping Machine M-60AXM                             | 22 |
| Fully Automatic Strapping Machine M-60AXN                             | 24 |
| Fully Automatic Strapping Machine M-60AXPB-AP-2HT                     | 14 |
| Fully Automatic Strapping Machine M-60AXPR-2HT                        | 19 |
| Fully Automatic Strapping Machine NS-3AD Standard Model               | 35 |
| Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model          | 33 |
| Fully Automatic Strapping Machine NS-3ADMS                            | 29 |
| Fully Automatic Strapping Machine NS-3AL Low Tabled Model             | 31 |
| Fully Automatic Strapping Machine - JN-85 PBTAPN                      | 56 |
| Fully Automatic Strapping System JN-85 APN                            | 38 |
| Fully Automatic Strapping System JN-85 E                              | 53 |
| Fully Automatic Strapping System JN-85 EM                             | 46 |
| Fully Automatic Strapping System JN-85 LPBU                           | 43 |
| Fully Automatic Strapping System JN-85 LPRU                           | 45 |
| Fully Automatic Strapping System JN-85 OP                             | 40 |
| Fully Automatic Strapping System JN-85 PBAPN                          | 55 |
| Fully Automatic Strapping System JN-85 PBU                            | 44 |
| Fully Automatic Strapping System JN-85 PRAPN                          | 41 |
| Fully Automatic Strapping System JN-85 PRU                            | 42 |
| Fully Automatic Strapping System JN-85 SE                             | 49 |
| Fully Automatic Strapping System JN-85 ZE                             | 51 |

### S

|                                                  |    |
|--------------------------------------------------|----|
| Semi-auto Pallet Strapping Machine JN-85 PSA     | 50 |
| Semi-automatic pallet strapping machine JN-85 PS | 48 |



**QUICK 3PL**  
LOGISTICS SIMPLIFIED

We are here to help you. Contact us at +1 (216) 533-2353 or  
ovi@quick3pl.com

Semi-Automatic Strapping Machine JN- 600 63  
Semi-Automatic Strapping Machine JN- 600VS 65  
Semi-Automatic Strapping Machine JN- 700 62  
Semi-Automatic Strapping Machine JN- 740 60  
Semi-Automatic Strapping Machine JN- 740DH 58  
Semi-Automatic Strapping Machine JN- 7mini-B 67



**QUICK 3PL**  
LOGISTICS SIMPLIFIED