



TABLE OF CONTENTS

- Fully Automatic Strapping Machine NS3A Series 2**
 - Fully Automatic Strapping Machine NS-3ADMS 2
 - Fully Automatic Strapping Machine NS-3AL Low Tabled Model 4
 - Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model
..... 6
 - Fully Automatic Strapping Machine NS-3AD Standard Model 8





FULLY AUTOMATIC STRAPPING MACHINE NS3A SERIES

FULLY AUTOMATIC STRAPPING MACHINE NS-3ADMS

SKU: NS-3ADMS

Fully Automatic Strapping Machine NS-3ADMS Medium-Sized Model with Stainless Steel Frame



- Fully Automatic Strapping Machine NS-3ADMS allows for an easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3ADMS allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3ADMS is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

Specifications



QUICK 3PL
LOGISTICS SIMPLIFIED

Strap Cycle Speed	2 sec./cycle
Tension Strength	1.5-60 kg
Table Height	760mm
Strap Width	5-15.5mm
Sealing Method	Heat Sealed
Electric Consumption	200W
Power Supply	110/220V 50/60Hz Single phase
Dimensions	860W x 570D x 750H mm
Net Weight	86kg

Max Packing Size

Categories: [Strapping Machine](#), [Fully Automatic Strapping Machine NS3A Series](#)




QUICK 3PL
LOGISTICS SIMPLIFIED



FULLY AUTOMATIC STRAPPING MACHINE NS-3AL LOW TABLED MODEL

SKU: NS-3AL

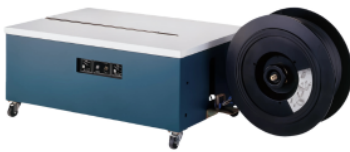

Fully Automatic Strapping Machine NS-3AL Low Tabled Model

- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3AL allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3AL is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

Specifications

Strap Cycle Speed	2 sec./cycle
Tension Strength	4-80 kg
Table Height	400mm
Strap Width	5-15.5mm
Sealing Method	Heat Sealed
Electric Consumption	200W
Power Supply	110/220V 50/60Hz Single phase
Dimensions	1530W x 610D x 400H mm
Net Weight	86kg

Max Packing Size

Categories: [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



QUICK 3PL

LOGISTICS SIMPLIFIED



QUICK 3PL

LOGISTICS SIMPLIFIED



FULLY AUTOMATIC STRAPPING MACHINE NS-3ADM MEDIUM-SIZED MODEL

SKU: NS-3ADM

Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model



- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3ADM allows for easy changing of strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3ADM is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

Specifications

Strap Cycle Speed	2 sec./cycle
Tension Strength	1.5-60 kg
Table Height	750mm
Strap Width	5-15.5mm
Sealing Method	Heat Sealed
Electric Consumption	200W
Power Supply	110/220V 50/60Hz Single phase
Dimensions	860W x 570D x 750H mm
Net Weight	86kg

Max Packing Size

Categories: [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



QUICK 3PL

LOGISTICS SIMPLIFIED



QUICK 3PL

LOGISTICS SIMPLIFIED



FULLY AUTOMATIC STRAPPING MACHINE NS-3AD STANDARD MODEL

SKU: NS-3AD

Fully Automatic Strapping Machine NS-3AD Standard Model



- Easy adjustment of tension on the control panel by setting the electromagnetic Dutch system.
- Low power consumption on 2-step tensioning and 0.2V seal blade designs allows for a very low Watt/Ampere level.
- Fully Automatic Strapping Machine NS-3AD allows for easy changing of the strap design to give a convenient replacement for different thicknesses.
- Dual tensioning keeps proper bending power on the strap to avoid defective strapping. The first step of the cycle reverses the strap around the package, and the second step applies positive mechanical tension that can be adjusted by a twist of a dial on the panel.
- Fully Automatic Strapping Machine NS-3AD is designed for durable and convenient use and is provided with compact storage. This model highlights a precision performance and trouble-free maintenance with a patent.
- Silent operation design of this model can be suspended after each strapping cycle; advanced strap feed keeps down the noise, unlike the startup sounds of the old systems.
- Advanced devices of safety and convenience, such as smoke vent, pneumatic tabletop, one-touch tension roller cleaning, tabletop folded edges, and CE-approved safety switches.

Specifications

Strap Cycle Speed	2 sec./cycle
Tension Strength	4-80 kg
Table Height	760mm
Strap Width	5-15.5mm
Sealing Method	Heat Sealed
Electric Consumption	200W
Power Supply	110/220V 50/60Hz Single phase
Dimensions	1400W x 640D x 1740H mm
Net Weight	110kg

Max Packing Size

Categories: [Fully Automatic Strapping Machine NS3A Series](#), [Strapping Machine](#)



QUICK 3PL

LOGISTICS SIMPLIFIED



QUICK 3PL

LOGISTICS SIMPLIFIED



QUICK 3PL

LOGISTICS SIMPLIFIED



QUICK 3PL

LOGISTICS SIMPLIFIED



INDEX

F

- Fully Automatic Strapping Machine NS-3AD Standard Model 7
- Fully Automatic Strapping Machine NS-3ADM Medium-Sized Model 5
- Fully Automatic Strapping Machine NS-3ADMS 1
- Fully Automatic Strapping Machine NS-3AL Low Tabled Model 3

